

TECHNICAL DATA MODULE SBD


Power Supply: 230VAC 50Hz
 Power consumption: 5VA
 Protection Class: IP42
 Ambient temperature: Max. 55°C
 Adjustment range: Stand-By /pause: 0,5 - 12hrs.
 Blow down/impulse: 2,5 - 60sec.
 Contact output: 1 change over / 230VAC
 Contact rating: Max. 230V 10A Resistive
 Weight: 950g

WIRING DIAGRAM

1 - 2 Power Supply 230V 50Hz
 3 - 4 Opening pulse 230VAC
 5 - 4 Closing pulse 230VAC

INSTALLING OF THE BLOWDOWN VALVE

The automatic blow down valve must not be installed direct on the outlet from the boiler, there must always be a manually attended operated valve between the boiler and the automatic blow down valve.

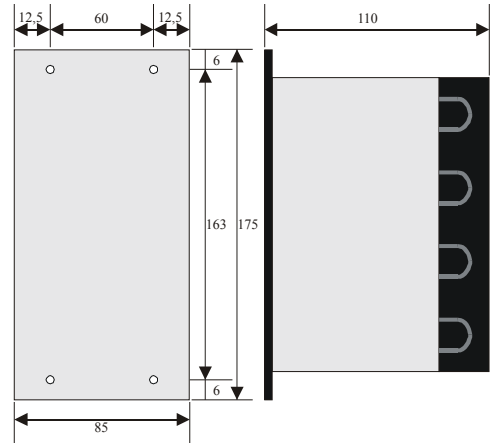

MODULE PANEL MOUNTING:
 B=85 * H=175 * D=110mm

CUT OUT: B=76 * H=152mm

MODULE WALL MOUNTING:
 B=75 * H=150 * D=110mm

