


## TECHNICAL DATA MODULE SLH

Power supply:	230VAC 50/60Hz
Power consumption:	10VA
Protection class:	IP42
Amb. temp.:	Standard +55°C
Input:	2 electrodes
Electrode voltage:	35VAC/2mA
Conductivity:	50µS
Contact rating:	230VAC 10A resistive
Weight:	900g.

## TECHNICAL DATA ELECTRODE

External fitting:	SEP thread M14 x 1,25 SME25 1" BSP SME32.x 1.¼" BSP
Length:	SEP 100 - 2000mm SME25 100 - 2000mm SME32.x 70 - 2000mm
Temperatur/pressure	SEP PNI00 280°C 6,4Mpa SME25 PN40 240°C 4,0Mpa SME32.x 260°C 4,0Mpa

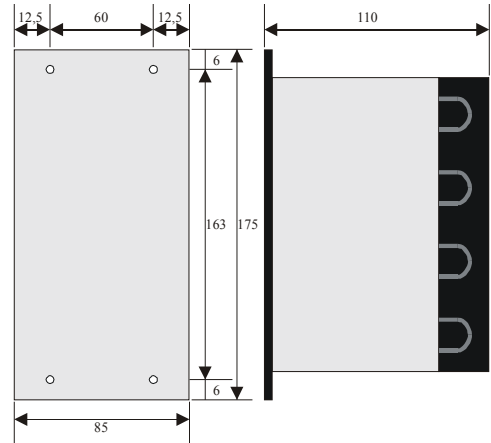

MODULE PANEL MOUNTING:  
B=85 \* H=175 \* D=110mm

CUT OUT: B=76 \* H=152mm

MODULE WALL MOUNTING:  
B=75 \* H=150 \* D=110mm

## ELECTRICAL CABLES

Electrode:	Heat resistant cable (Steam boilers) Length - unlimited
Other cables	Standard quality The wiring shall conform to electrical requirement

## WIRING DIAGRAM MODULE SLH

1 - 2	Power supply, standard 230V 50/60 Hz
2-4/5-6	Low level alarm 3-4 breaking by low level 5-6 Closing by low level
7-8/9-10	High level alarm 7-8 breaking by high level 9-10 closing by high level
13	Gnd. electrode stand
14	Electrode, low level alarm
16	Electrode, high level alarm

